


Max 3 Driver Connection Manual & Notes


"Max 3" for All HPC and HR.

Sep. 04, Team STEP/OJ Rev.01

C-51847 Series 20x4

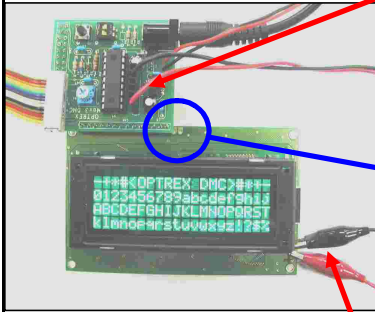


RED LED power supply wire must be connect with Pin #1 on the board and BLACK wire to the Pin #5.

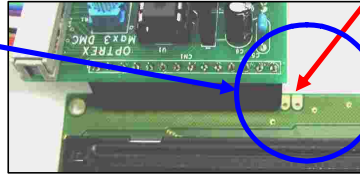

Pin #15 and #16 for LED power connection only, no I/O connection.

Check the polarity when connect the alligators, RED to the "+"(Anode) and BLACK to the "-"(Cathode,K).



C-51848 Series 16x2

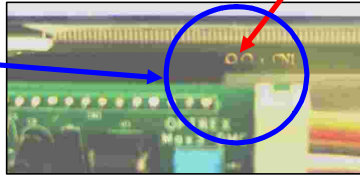

Pin #1 and #2 for LED power connection only, the I/O starting from Pin #3 to #16. (This model only)

Pin #17 and #18 for LED power connection only, no I/O connection.

C-51849 Series 40x4

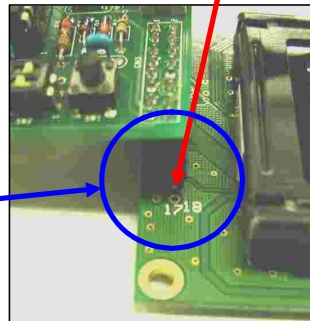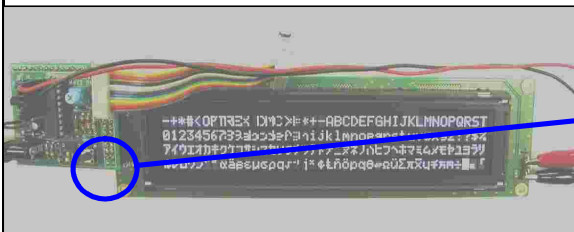

Pin #15 and #16 for LED power connection only, no I/O connection.

C-51850 Series 40x2

